



Range overview

Pro Series




clipsal.com/proseries

Life Is On

CLIPSAL
by Schneider Electric

DEPARTURES

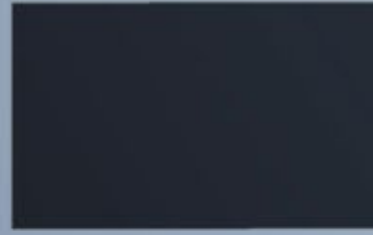

Pro Series – clever, strong, easy

Pro Series is the first range of robust switches and sockets designed to meet the needs of commercial buildings.

Clever features

After extensive market research and listening to customer feedback, we have designed a range of switches and sockets for commercial buildings. Pro Series offers permanent circuit identification with integrated windows. The skin is secured in place helping to protect your investment. Planning, commissioning and installing of the new Pro Series is quick and easy.

Attractive design

The range is aesthetically appealing with fresh, clean lines and bevelled edges to deflect impacts. Available in white and black, the switches and sockets will blend into any commercial environment. The clean and seamless design makes for an elegant appearance and avoids attracting dirt.

Extensive functions

The Pro Series range includes standard switches and sockets, as well as data sockets, dimmers, and USB chargers. The USB chargers feature both A and C type connections. Connected systems are also supported with connected dimmer and switches, and C-Bus master and slave modules.



Pro Series socket, white



Pro Series socket, black



Circuit ID window



Secure clip-on skin



Impact deflection



Seamless design



IK08 impact resistant



Extensive list of functions

Retail and transportation

Shopping malls, airports and train stations are busy places with a lot of traffic. Sockets in particular are exposed to impacts and can be easily damaged by trolleys, baggage or cleaning machines.

Robust

Pro Series has been designed with quality materials and features to resist impacts in exposed, high traffic areas. Switches also feature integrated locking bars to reduce the chance of module pushbacks.

IK08 impact rating

Standard sockets have an impact rating of IK08, which means they are strong enough to withstand the daily knocks of busy public places like shopping malls and airports.

Circuit ID protection windows

The circuit identification is easy to read and permanent, making it simple for facility managers and electricians to identify circuit numbers in large buildings.

Functions for commercial applications

The sockets are available in 10, 15 and 20 amp versions to connect professional appliances requiring higher load capability. Other functions are also available such as round earth sockets, RCD sockets, and indicators.



Single socket horizontal 10 amp



Twin socket horizontal round earth 10 amp



USB chargers are provided in a number of configurations

Education

Secure skins and robust design

Secure skins, not removable by hand

Pro Series skins can't be removed by hand, avoiding loss of the skins. The switches also feature integrated locking bars that reduce the chance of module pushbacks.

USB solutions

The new Pro Series offers a wide range of USB solutions with type A, and type A & C modules. These can be easily integrated into sockets and switch plates.



Dual USB charger type A & C



Pro Series offers a wide range of product options including 40 Series mechanisms and extensive options for your building.

Offices and public buildings

Fresh and clean aesthetic

Protected circuit identification

Pro Series features simple and clear circuit identification. The protected ID ensures it's easy to identify circuits and maintain consistency with labelling across the building.

Electronic functions

Pro Series offers a wide variety of electronic functions. The PIR motion sensor module provides hands-free control of lighting while saving energy by only remaining on when required. Ideal for use in small spaces like entrances, hallways and storage rooms.

C-Bus modules

Pro Series offers C-Bus compatibility with a new range of 40 Series C-Bus* modules making your building management easy.





PIR motion sensor

Clever features

Clear advantages

With Pro Series, circuit identification labels are protected behind a clear window. The labels adhere to panels designed into the grids, so even if skins are inadvertently swapped during maintenance, the labels will always display the correct circuit identification. There are two windows on opposite edges, so the ID can be visible in any situation.

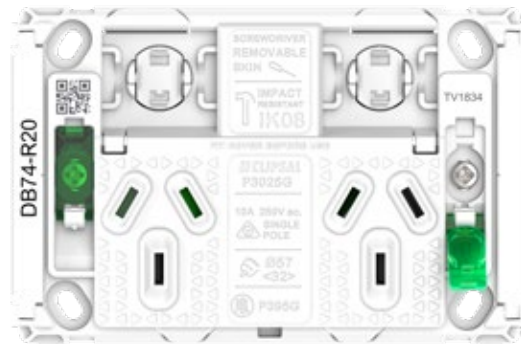


Consistent location on sockets and switches

Compatible with 9mm Dymo® and Traffolyte labels 55 x 7.5 x 1.6mm

Secure skins

Lost skins can be a frequent problem in public buildings. The new Pro Series comes with skins that clip on securely and cannot be removed by hand. Fixing them is easy and fast – you simply click them onto the grid. No screws are needed. Special notches on the skins allow quick and easy removal with a screwdriver.

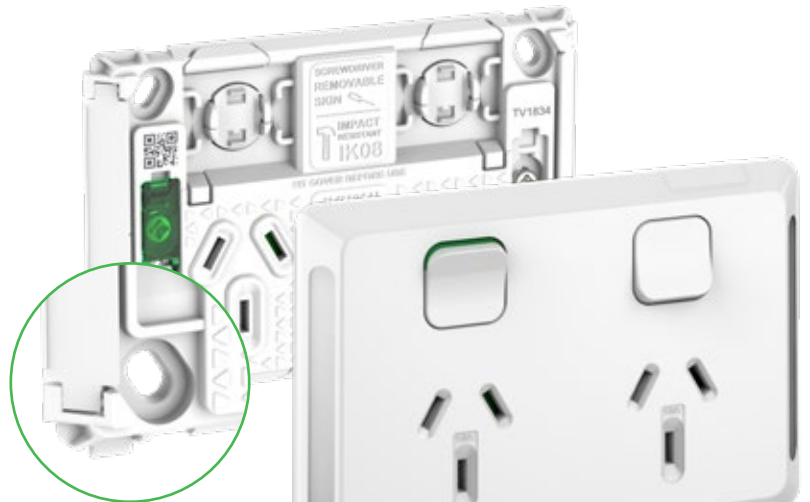

Long-lasting and robust

Sockets positioned low on walls can be exposed to rough conditions like bumps from trolleys and other equipment, which can often result in cracked or broken skins. That's why new Pro Series sockets are made extra tough and have an IK08 impact rating*.

*Standard sockets only, does not include switches or sockets with extra switches.



Secure Skin



Protected Circuit ID



Consistent Labelling



Impact Deflection



IK08 Impact Resistant




Circuit ID Windows

Clever switch innovation

Pro Series grids feature screw covers, drill guides and 40 series mechanisms for easy installs and customisation.

Locking bar helps to reduce the chance of module pushbacks, and makes it easier to change and upgrade

Fully compatible with all 40 Series modules

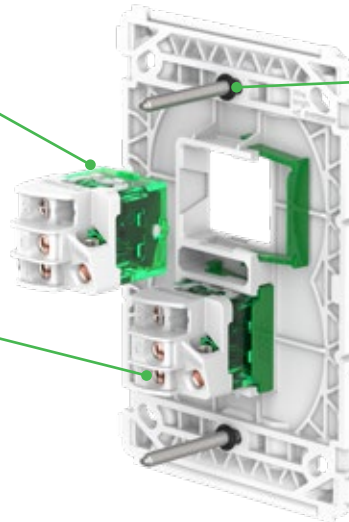


Pre-mounted screws for faster fit-off

Circuit identification panel to fit traffolyte labels or Dymo® labels



Screw covers help stop access to screws

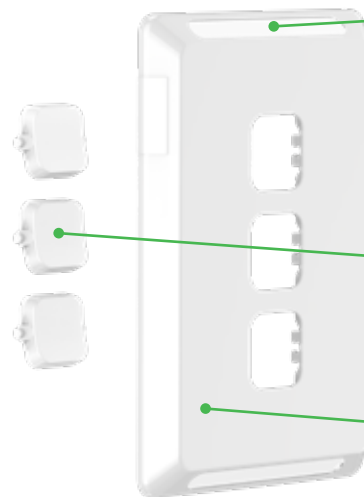

Circuit identification window

Optional pictogram rockers to personalise switches

Gloss finish

Screwdriver notch to aid removal from locking bar






Optional bright white LEDs can be easily wired and set as locator or indicator

Hybrid screws are suitable for square drive, Phillips and flathead screwdrivers

Sockets with a difference

Pro Series features innovations like pre-mounted screws, screw covers and in-line terminals.

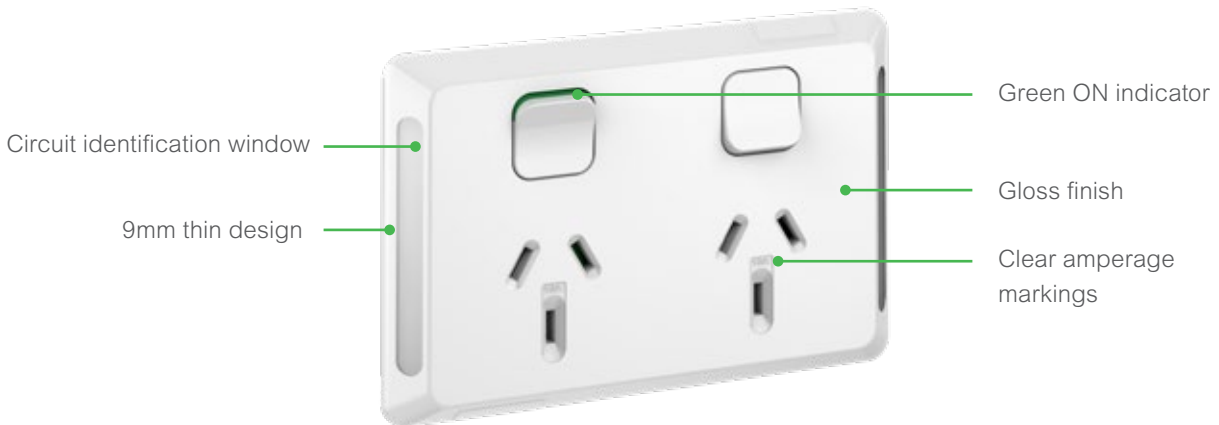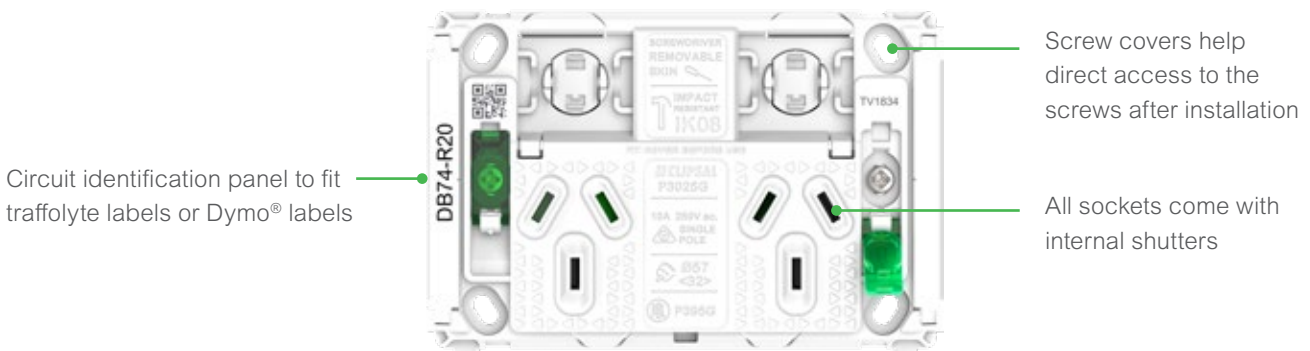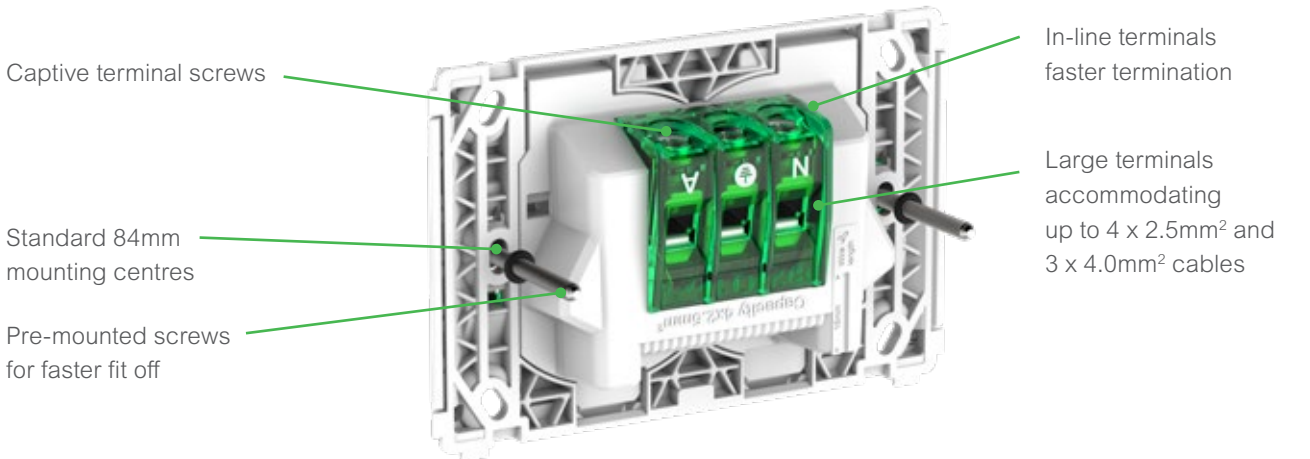

Secure Skin



Protected Circuit ID



Consistent Labelling



Impact Deflection



IK08 Impact Resistant



Circuit ID Windows

Clever accessory



IK10 enclosure

Designed to withstand 20 joules of impact (the equivalent to the impact of a 5kg mass dropped from 400mm above the impacted surface).



Lockable

Screw driver operated lock to limit misuse.

Pro Series add-on accessory

The Pro Series IK10 box accessory is a strong add-on which provides additional strength and security for sockets and switches.

The flap can be padlocked shut while an appliance is plugged in, restricting access to non-authorized people.

Real life situations inspire new solutions

Restrict public access to sockets and switches with the lockable cover.



40 Series electronic modules



Rotary dimmers



Push button dimmers and switches



USB mechanism with built-in current management and rotating head



PIR motion sensor mechanism

40 Series electronic accessories are designed for clever functionality.

Electronic accessories fit Pro Series switch grids. Secured in place with the mechanism locking bar, they can be easily changed to suit vertical or horizontal orientation. The range includes standard electronic accessories such as rotary and push-button dimmers, PIR sensors, dimmers and USB chargers.

Rotary and push-button dimmers

40 Series electronic products include both push-button and rotary dimmers. Push-button dimmers offer multi-way dimming over standard wiring using ControlLink. The dimmers offer adjustable brightness limit settings and have built in resettable protection. They are optimised for performance with the Clipsal TPDL series LEDs.

ControlLink connectivity for Multiway Control

ControlLink provides multiway control and linking of groups of lights with standard wiring.

USB chargers

USB chargers, now including a USB C option, have a patented rotatable head for easy reorientation. They also include patented current management technology, which reduces the output current to help prevent overheating while minimising charge times.

PIR motion sensor

The 40 Series PIR motion sensor mechanism is simple to install and configure with front light level and timer adjustment. It is ideal for hands free lighting control in entry ways, hallways or stairs.



40 Series connected modules



Connected dimmers and switches



Push button dimmers and switches

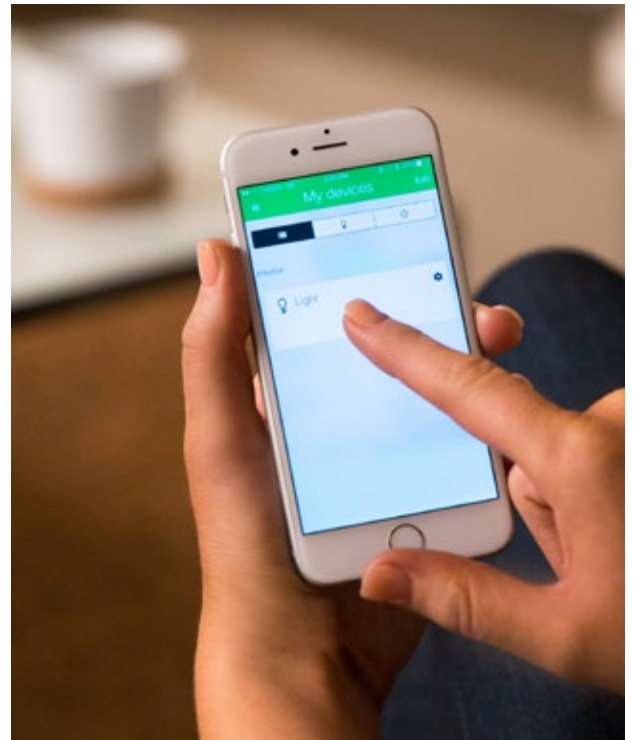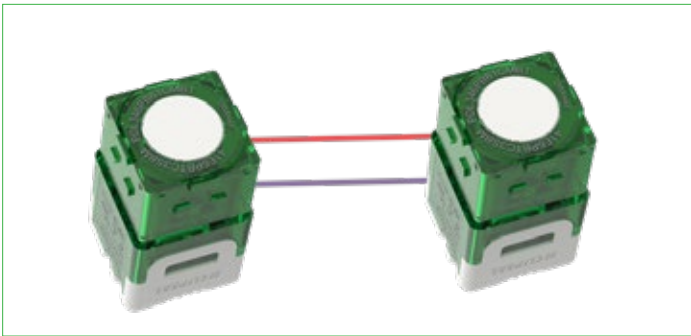

Configure from the Wisier Room app

With ControlLink and Bluetooth Low Energy for simple connectivity.

Connected switch

The 3 wire connected push button electronic switch offers in-room smart device app control via the Wisier Room app. It is a push button switch, 1s-24hr timer, 24/7 scheduler and digital sunset switch all in one. Also featuring ControlLink for multiway switching. Ideal for control of external lighting.

Connected dimmer

The 3 Wire Connected Push button dimmer offers in-room smart device app control via the Wisier Room app. Its superior LED dimming performance provides a premium dimming experience. It also has built in 1s-24hr time delay and 24/7 scheduling and digital sunset switch functions. Includes ControlLink for multiway dimming.

Wisier Room app

Connected 3-wire electronic products can be configured and controlled via the Wisier Room app on most tablets or phones to perform programmed tasks like:

- Switch and dim lights with a configurable timer
- Exhaust fan runs-on after being switched off
- Operate external lights on 24hr/7day schedules
- Automatic seasonal sunrise and sunset tracking
- It's also easy to copy and paste settings to save time or reset everything to your original set point.

PIR motion sensor

The PIR motion sensor mechanism is simple to install and configure with front light level and timer adjustment. It is ideal for hands free lighting control in entry ways.

QR Codes for Wisier Room App



C-Bus®

40 Series Modules for C-Bus® Building Automation system



5041NMML
C-Bus® 40 Series Master Module



5041NMS
C-Bus® 40 Series Slave Module

Building automation and energy management made simple

C-Bus® building automation system is a powerful, fully integrated system that can control and automate lighting and many other electrical systems and products. Designed for commercial or residential building automation, it brings control, comfort, efficiency and ease of use to its occupants.

C-Bus® integrations

C-Bus® 40 Series modules can be mounted to Pro Series to create wall plates for C-Bus®. It is possible to create up to a 4 gang wall plate with one master and 3 slave modules. The wallplate is programmable as ON/OFF toggle, dimmer, timer, scene control, bell press, shutter/blind control, fan speed and custom functions. Selectable blue and red LED indicator can be configured through C-Bus® configuration software. The 40 Series modules can be programmed via Learn mode or the C-Bus® configuration software and draw 18mA from the C-Bus network.



Network connectivity



Multiple network connectivity options



Range of RJ45 connectors including shielded and unshielded



An extensive network connectivity solution is now available in 40 Series modules.

Enhanced connectivity

An extensive Network Connectivity solution, including Cat 5e, Cat 6 and Cat 6A connectors, is now available in 40 Series modules. With mechanisms for RJ45 networking, HDMI, TV and audio, you will be able to meet customer networking and AV requirements.

Audio, video and networking

40 Series modules include a wide range of audio, visual and networking mechanisms to suit commercial application. TVs can be connected to media devices through F-Type, PAL and HDMI mechanisms. Audio systems can be connected via RJ45 and RCA mechanisms. RJ45 mechanisms can be used for connecting all the smart devices in the network


Flexibility of Pro Series grids

No two networks are the same, which is where the range of audio, video and networking mechanisms make every setup simple and easy. You can use different combinations of mechanisms in up to a 6 gang grid, ensuring the required services are available at each outlet to cater for any end user requirements.-

Actassi data networking

Our Actassi data range is a complete networking solution which includes Cat5e, Cat6 and high performing Cat 6A mechanisms. Cat 6 is the entry level solution for commercial applications, delivering 1Gbit p/s speeds. Cat 6A is our solution for critical building networks, delivering 10 Gbit p/s speeds with superior bandwidth.

Product references

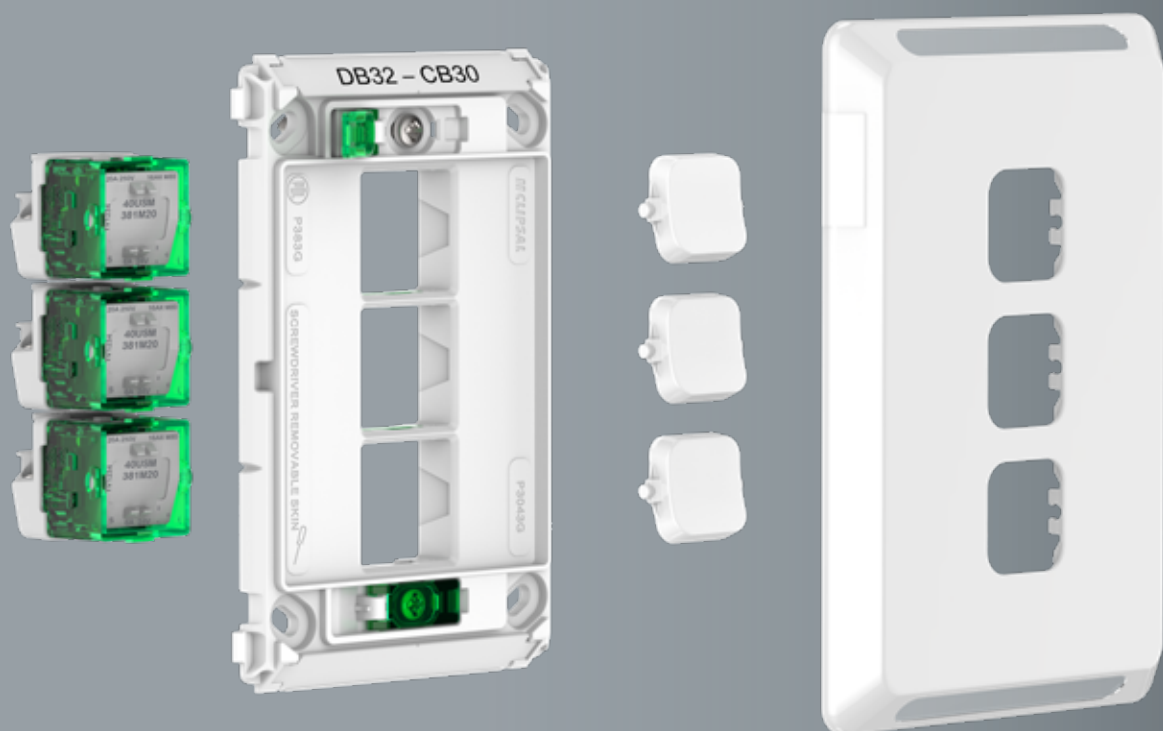

Switches, Skins and Mechanisms

Pro Series offers one to six-gang grids with mechanism locking bars for multiple combinations of 40 Series modules and mechanisms.

Switches

Pro Series grids feature innovative protective screw caps, which help prevent screw access after installation.

Switch plates



P3040VX-XW
Blank Plate,
Vertical/Horizontal
P3040VX-BK
Blank Plate, Black
Vertical/Horizontal



P3041VA-XW
Switch, Vertical,
1 Gang,
250VAC, 16AX



P3042VA-XW
Switch, Vertical,
2 Gang,
250VAC, 16AX



P3043VA-XW
Switch, Vertical,
3 Gang,
250VAC, 16AX



P3044VA-XW
Switch, Vertical,
4 Gang,
250VAC, 16AX



P3045VA-XW
Switch, Vertical,
5 Gang,
250VAC, 16AX



P3046VA-XW
Switch, Vertical,
6 Gang,
250VAC, 16AX



P3041HA-XW
Switch, Horizontal,
1 Gang,
250VAC, 16AX



P3042HA-XW
Switch, Horizontal,
2 Gang,
250VAC, 16AX



P3043HA-XW
Switch, Horizontal,
3 Gang,
250VAC, 16AX



P3044HA-XW
Switch, Horizontal,
4 Gang,
250VAC, 16AX

Architrave switches



P3041A-XW
Architrave Switch, 1 Gang,
250VAC, 16AX
P3041A-BK
Architrave Switch Skin,
1 Gang, 250VAC, 16AX



P3042A-XW
Architrave Switch, 2 Gang,
250VAC, 16AX, LED
P3042A-BK
Architrave Switch Skin,
2 Gang, 250VAC, 16AX

Time delay



P3019-XW
Pneumatic Timer, Time delay
Switch 250VAC, 10A

Cooker switches



P3041-45-XW
Cooker Switch, Single Pole
250VAC, 45A



P3041D45-XW
Cooker Switch, Double Pole,
250VAC, 45A

Switches, Skins and Mechanisms (cont'd)

IP44 rated switches



P3041V44-XW
Switch, IP44 Rated,
1 Gang, 250VAC, 16AX



P3042V44-XW
Switch, IP44 Rated,
2 Gang, 250VAC, 16AX



P3043V44-XW
Switch, IP44 Rated,
3 Gang, 250VAC, 16AX



P3044V44-XW
Switch, IP44 Rated,
4 Gang, 250VAC, 16AX

Switch grids

Pro Series grids are only suitable for 40 series mechanisms.



P3041G
Switch Grid,
Vertical/Horizontal,
1 Gang



P3042G
Switch Grid,
Vertical/Horizontal,
2 Gang



P3043G
Switch Grid,
Vertical/Horizontal,
3 Gang



P3044G
Switch Grid,
Vertical/Horizontal,
4 Gang



P3045G
Switch Grid,
Vertical/Horizontal,
5 Gang



P3046G
Switch Grid,
Vertical/Horizontal,
6 Gang

Switch grids and skins



P3041VH-XW
Switch Grid and Skin
Vertical/Horizontal
1 Gang



P3042VH-XW
Switch Grid and Skin
Vertical/Horizontal
2 Gang



P3043VH-XW
Switch Grid and Skin
Vertical/Horizontal
3 Gang



P3044VH-XW
Switch Grid and Skin
Vertical/Horizontal
4 Gang



P3045VH-XW
Switch Grid and Skin
Vertical/Horizontal
5 Gang



P3046VH-XW
Switch Grid and Skin
Vertical/Horizontal
6 Gang

Skins – including colours



P3041C*
Switch Skin,
Vertical/Horizontal,
1 Gang



P3042C*
Switch Skin,
Vertical/Horizontal,
2 Gang



P3043C*
Switch Skin,
Vertical/Horizontal,
3 Gang



P3044C*
Switch Skin,
Vertical/Horizontal,
4 Gang



P3045C*
Switch Skin,
Vertical/Horizontal,
5 Gang



P3046C*
Switch Skin,
Vertical/Horizontal,
6 Gang

* Available in

White (XW)

BLACK (BK)

Sockets, Skins and Mechanisms

Sockets

Pro Series sockets feature grids with screw covers, which help prevent screw access after installation.



P3015-XW
Power Outlet, Single,
250VAC, 10A



P3015-15-XW
Power Outlet, Single,
250VAC, 15A



P3015-20-XW
Power Outlet, Single,
250VAC, 20A



P3015XA-XW
Power Outlet, Single,
250VAC, 10A, with extra switch



P3025-XW
Power Outlet, Twin,
250VAC, 10A



P3025-15-VW
Power Outlet, Twin,
250VAC, 15A



P3025XA-XW
Power Outlet, Twin, 250VAC,
10A, extra switch



P3025L-XW
Power Outlet, Twin, 250VAC,
10A, Round earth



P3025PID-XW
Power Outlet, Twin, 250VAC,
10A, Power Indicator



P3015-4-XW
Power Outlet, Quad,
250VAC, 10A



P3015-4XXUA-XW
Power Outlet, Quad,
250VAC, 10A,
2 x extra switches, less
mechanisms



P3015V-XW
Power Outlet, Single,
Vertical, 250VAC, 10A



P3015V15-XW
Power Outlet, Single,
Vertical, 250VAC, 15A



P3025V-XW
Power Outlet, Twin,
Vertical, 250VAC, 10A




P3025VXA-XW
Power Outlet, Twin, Vertical,
250VAC, 10A, with extra switch

Double pole sockets



P3015D-XW
Power Outlet, Single,
250VAC, 10A, Double Pole



P3015D15-XW
Power Outlet, Single, 250VAC,
15A, Double Pole



P3025D-XW
Power Outlet, Twin, 250VAC,
10A, Double Pole



P3025USB2-XW
Power Outlet, Twin,
250VAC, 10A, with
Twin Type A USB
Charger



P3025USBAC-XW
Power Outlet, Twin,
250VAC, 10A, with
Type A+C USB
Charger



P3043HSUSB-XW
3 Gang USB charging
station, Type A, 3x2.1A
(4.5A max)

USB chargers

RCD sockets



P3025RCD30-XW
Power Outlet, Twin,
30mA RCD Protected,
250VAC, 10A



P3025RCD10-XW
Power Outlet, Twin,
10mA RCD Protected,
250VAC, 10A

Connected socket



P3015T-XW
Single socket with timer
250VAC, 10A

Switches, Skins and Mechanisms (cont'd)

Socket grids



P3015G
Power Outlet Grid, Single,
250VAC, 10A



P3015-15G
Power Outlet Grid, Single,
250VAC, 15A



P3015-20G
Power Outlet Grid, Single,
250VAC, 20A



P3015XAG
Power Outlet Grid, Single,
250VAC, 10A, with
extra switch mechanism



P3025G
Power Outlet Grid, Twin,
250VAC, 10A



P3025XAG
Power Outlet Grid, Twin,
250VAC, 10A, with extra
switch mechanism



P3025-15G
Power Outlet Grid, Twin,
250VAC, 15A



P3025LG
Power Outlet Grid, Twin,
250VAC, 10A, Round Earth



P3025PIDG
Power Outlet Grid, Twin,
250VAC, 10A, Power indicator



P3015-4G
Power Outlet Grid, Quad,
250VAC, 10A



P3015-4XXUAG
Power Outlet Grid, Quad,
250VAC, 10A, 2 x extra
switches less mechanisms



P3015VG
Power Outlet Grid, Single,
Vertical, 250VAC, 10A



P3015V15G
Power Outlet Grid, Single,
Vertical, 250VAC, 15A



P3025VG
Power Outlet Grid, Twin,
Vertical, 250VAC, 10A



P3025VXAG
Power Outlet Grid, Twin,
Vertical, 250VAC, 10A,
extra switch



P3025USB2G
Power Outlet Grid, Twin,
250VAC, 10A, with dual
USB type A



P3043USBG
3 Gang USB
charger grid

Socket skins – including colours



P3015C*
Power Outlet Skin, Single,
250VAC, 10A



P3015-15C*
Power Outlet Skin, Single,
250VAC, 15A



P3015-20C*
Power Outlet Skin, Single,
250VAC, 20A



P3015XC*
Power Outlet Skin, Single,
250VAC, 10A, extra switch



P3025C*(1)(2)
Power Outlet Skin, Twin
250VAC, 10A



P3025-15C*
Power Outlet Skin, Twin
250VAC, 15A



P3025XC*
Power Outlet Skin, Twin,
250VAC, 10A,
extra switch



P3025LC
Power Outlet Skin, Twin,
250VAC, 10A, Lighting
extra switch



P3015-4C*
Power Outlet Skin, Quad,
250VAC, 10A



P3015-4XXC*
Power Outlet Skin, Quad,
250VAC, 10A,
2 x extra switches



P3015VC*
Power Outlet Skin, Single,
Vertical, 250VAC, 10A



P3015V15C*
Power Outlet Skin, Single,
Vertical, 250VAC, 15A



P3025VC*(1)
Power Outlet Skin, Twin,
Vertical, 250VAC, 10A




P3025VXC*
Power Outlet Skin, Twin,
Vertical, 250VAC, 10A,
extra switch



P3043HUSBC*
3 Gang USB Charger
black skin

Available in



Accessory



P223H
Protective box IK10 with lockable lid.
Suitable for switches and sockets

Sockets, Skins and Mechanisms (cont'd)

Mechanisms



40M
Switch Mechanism,
1/2 way, 250VAC,
10AX



40USM
Switch Mechanism,
1/2 way, 250VAC,
20A/16AX



P40MBPR-XW
Switch Mechanism,
Bell Press Return,
250VAC, 10A



P40M32COOK-XW
Switch Mechanism,
1 way, 250VAC, 32A,
marked Cooker



P40MD10*
Switch Mechanism, Double
Pole, 250VAC, 10AX



P40MD20*
Switch Mechanism,
Double Pole, 250VAC, 20AX



40MI
Switch Mechanism,
Intermediate, 250VAC,
10AX



P40RSM3-XW*
Switch Mechanism, Rotary,
4 Position, 250VAC,
10A, OFF-1-2-3



P40RSM2-XW*
Switch Mechanism, Rotary,
4 Position, 250VAC,
10A, OFF-1-OFF-2



P49M-XW*
Switch Mechanism,
3 Position, 250VAC, 10A



48HD-TN
PCU adaptor
mechanism



P40CSFM-XW*
Fan Speed Controller
Mechanism, 3 Speed,
250VAC, 75VA



P40MLEDBW-XW*
LED Module, 250VAC,
Bright White

P40MLEDBW-BK*
LED Module, 250VAC,
Black



40N-RD
Power Indicator
Mechanism, LED,
250V, Red



40N-GR
Power Indicator
Mechanism, LED,
250V, Green



40N24-RD
Power Indicator
Mechanism, LED, 24V,
Red



40N24-GR
Power Indicator
Mechanism, LED, 24V,
Green



40NPA-AM
Power Indicator Mechanism,
LED, 250V, Amber, Marked
Power available

*Specific dolly included with the mechanism

Network connectivity

The 40 Series modules offer includes all common connector options for network connectivity.

Audio connectors

RCA sockets for stereo speaker cables.



40BC/2-TN
Banana Audio
Connectors RD + BK



40SPK/2-TN
RCA Audio
Sockets RD+BK



40FFPMS-TN
TV Socket PAL Front,
F-Type Rear



40PFM-TN
TV Socket F-Type Front,
F-Type Rear

HDMI sockets

Ideal for organising HDMI communications cables.



40HDMIA-TN
HDMI Socket
Angled Rear



40HDMIS-TN
HDMI Socket
Straight Rear



40RJ64SMT-TN
Cat 3 Telephone
Connector RJ12



40ADPKS-TN
Adaptor RJ Tyco
Krone Siemon, 10Pk



40ADPSY-TN
Adaptor RJ Systemax
AT&T, 10Pk

Telephone sockets

For organising telephone cables.

Keystone mechanism adaptors

Actassi RJ45 sockets

High performing RJ45 sockets for connecting your network.



40RJ45SMA5C-TN
Cat 5E Connector
RJ45 Unshielded



40RJ45SMA5SHC-TN/PK
Cat 5E Connector RJ45,
Shuttered, Unshielded



40RJ45SMA6C-TN
Cat 6 Connector
RJ45 Unshielded



40RJ45SMA6SHC-TN
Cat 6 Connector RJ45
Shuttered, Unshielded



40RJ45SMA6AC-TN
Cat 6A Connector RJ45
Unshielded



40RJ45SMA6ASC-TN
Cat 6A Connector RJ45
Shuttered Unshielded

Actassi RJ45 sockets (cont'd)



VDIB177AXU10TN
Cat 6A Connector RJ45
Unshielded DPM 10Pk



VDIB177AXB10TN
Cat 6A Connector RJ45
Shielded DPM 10Pk

Connected and Electronic Devices

Connected devices

Offers multi-way push-button switching and dimming with app control and configuration (3-wire model). ControlLink functionality delivers true multiway dimming and switching.



P41EPBDWCLM-XW
Push-button Wiser LED dimmer with BLE, app configuration, 300W, 3-wire, with ControlLink



P41E10PBSWM-XW
Push-button Wiser 10A switch with BLE, app configuration, 3-wire, with ControlLink configuration



P41EPBCLM-XW
Smart remote Push-button ControlLink mechanism with LED indicator



5041NMML
C-Bus 40 Series Master Module



5041NMS
C-Bus 40 Series Slave Module

Dimmers


Rotary and push button dimmers support LED loads primarily. Push button dimmer features ControlLink connectivity.



42E350RLD2M-VW
Rotary LED Dimmer 350W, 2-wire



41E300PBUD2SM-VW
Push-button Universal Dimmer 300W 2-wire, with ControlLink



41EPIRM-TN
PIR motion sensor, 150W LED, 3-wire, 5m range

USB chargers

Single and double USB charger mechanisms. (USB charger Modules come with white cap adaptor – black cap adaptor to be ordered separately) The USB chargers offer functionality and flexibility with in-built protection.



40E1USBM-VW
Single USB charging mechanism 1.5A



40E2USBM-VW
Dual USB charging mechanism, 2x2.1A (3.1A max)



40E2USBACM
Dual USB Charging Mechanism, 1 x 2.4A Type A + 1 x 3.0A Type C (3.1A max)

Connected and Electronic Devices (cont'd)

Caps and accessories

All accessories available in Pro Series optional colours.



P40APB
Push-button parts pack assembly, blank
Available in...
P40APB-XW White
P40APB-BK Black



P40EDIMKB
Rotary Dimmer knob parts pack
Available in...
P40EDIMKB-XW White
P40EDIMKB-BK Black



40E1USBCAP
Mechanism Cap to suit single USB charger
Available in...
40E1USBCAP-VW White
40E1USBCAP-BK Black



40E2USBACCAP
Mechanism Cap to suit dual Type A+C USB charger
Available in...
40E2USBCCAP-VW White
40E2USBCCAP-BK Black



40E2USBCAP
Mechanism Cap to suit dual USB charger
Available in...
40E2USBCAP-VW White
40E2USBCAP-BK Black



P40RSM2KB
Dolly Rotary marked OFF-1 - OFF-2
Available as...
P40RSM2KB-XW
P40RSM2KB-BK



P40RSM3KB
Dolly Rotary marked OFF-1-2-3
Available as...
P40RSM3KB-XW
P40RSM3KB-BK

Accessories

Pro Series range suits existing mounting accessories with the addition of the new 4-gang socket wall bracket (3155H4), wall box (3157/4PRM) and mounting block. We have also developed a new range of mounting blocks for single gang switches and sockets. Like the shallow optimum mounting block (3000SM-VW), the deep optimum mounting block (3000DM-VW) and the standard mounting block (449AB-VW).



P3000PP-50
Paint Protector



3155H4
Quad Socket Mounting Bracket



3157/4PRM
Quad Socket Plastic Wall Box (54mm depth)



3004M-VW
Quad Socket Mounting Block (38mm depth)



449AB-VW
Standard Mounting Block (34mm depth)



3000SM-VW
Shallow Iconic Mounting Block (32mm depth)



3000DM-VW
Deep Iconic Mounting Block (40mm depth)











P3000T
Skin Removal Tool

Pictogram rockers

Pro Series switches come standard with plain rockers, which you can customise with optional pictogram rockers.

Printer dolly for P40M:

Description	Pictogram	Pro Series
BLANK		P40AR*
FAN		P40FR*
LIGHT		P40LR*
HEAT		P40HR*
FRIDGE		P40FRR*
SENSOR		P40SR*
HOT WATER		P40HWR*
AIRCOND		P40ACR
ALARM		P40ALR
ZONE 1	Zone 1	P40ZR1*
ZONE 2	Zone 2	P40ZR2*
ZONE 3	Zone 3	P40ZR3*
32A	32A	P40R32*

Printed dolly for 3 positions mechanism (P49M-P49MBPR):

Description	Pictogram	Pro Series
Blank		P49T*
Sensor On Off	Sensor Off On	P49TSOO*
Auto On Off	Auto Off Manual	P49TAOM*
Up Off Down	Up Off Down	P49TUOD*

Printed dolly for cooker mechanism (P40M32):

Description	Pictogram	Pro Series
32A Cooker	Cooker	P40R32COOK*
20A Cooker	Cooker	P40R20COOK*

Latching dolly (P40M):

Description	Pictogram	Pro Series
BLANK latching		P40LOCKR

* Available in

 White (XW)

 BLACK (BK)

How to order

With set prefixes, part numbers and colour initials, ordering the Pro Series range is simple.

Catalogue number convention

Socket nomenclature		Prefix = Design	Number of gang	Extras		Color code
Pro Series assembled socket – horizontal 1 gang 10A	P3015-XW	P30	15		–	XW*
Pro Series assembled socket – horizontal 2 gang 10A	P3025-XW	P30	25		–	XW*
Pro Series assembled socket – vertical 2 gang 10A	P3025V-XW	P30	25	V	–	XW*
Pro Series assembled socket – horizontal 2 gang 15A	P3025-15-XW	P30	25	15	–	XW*
Pro Series assembled socket – horizontal 1 gang 10A extra switch	P3025XA-XW	P30	25	XA	–	XW*
Pro Series SKIN socket – horizontal 1 gang 10A	P3025C-**	P30	15	C	–	**
Pro Series GRID socket – horizontal 1 gang 20A	P3025-20G	P30	25	20	G	

(V)=Vertical (XA)=Extra-Switch Assembled (C)=Skin (G)=Grid

*All assembled products come in white

Switch nomenclature		Prefix = Design	Number of gang	Extras		Color code
Pro Series assembled switch – 1 gang vertical	P3041VA-XW	P30	41	VA	–	XW*
Pro Series assembled switch – 2 gang vertical	P3042HA-XW	P30	42	HA	–	XW*
Pro Series GRID & SKIN without mechanism switch – 2 gang	P3042VH-XW	P30	42	VH	–	XW*
Pro Series SKIN switch – 2 gang	P3043C-**	P30	43	C	–	**
Pro Series GRID switch – 4 gang horizontal	P3043G	P30	44		G	

(VA)=Vertical Assembly (HA)=Horizontal Assembly (VH)= Vertical or Horizontal Assembly (C)=Skin (G)=Grid

*All assembled products come in white

**Colour codes

For all the products offer	XW	White
	BK	Black
Only for specific reference	DB	Blue
	RD	Red
See catalogue pages	GR	Green

How to order (cont'd)

Customize your products

Pro Series – Twin socket in black



P3025G

+



P3025C-BK

Pro Series – 1 gang switch vertical white with printed rocker sensor



P3041VA-XW

+



P40SR-XW

Pro Series – 1 gang switch vertical black with USB A+C



P3041G

+



40E2USBACM

+



P3041C-BK

+



40E2USBACCAP-BK

Pro Series – Network connectivity integrated in a white switch plate



P3042VH-XW

+




41EPIRM-TN

Pro Series – PIR motion sensor integrated in a black plate



P3041G

+



41EPIRM-TN

+



P3041C-BK





For more information about the Pro Series range, contact your local Clipsal and Schneider Electric Partner Business Representative, electrical wholesaler, or visit clipsal.com/proseries

Schneider Electric (Australia) Pty. Ltd.
33-37 Port Wakefield Road,
Gepps Cross, South Australia, 5094

Consumer Support Enquiries
Phone: 1300 669 925
Website: clipsal.com/contactus

National Customer Care (trade only)
Phone: 1300 369 233

©2019 Schneider Electric. All Rights Reserved. This document has been printed on recycled paper.
998-20724267_AU-GB

clipsal.com/proseries

Life Is On

CLIPSAL
by Schneider Electric